

# Probing the covariance matrix

*Kenneth M. Hanson*

Los Alamos National Laboratory (ret.)

BIE Users Group Meeting, September 24, 2013



This presentation available at  
<http://kmh-lanl.hansonhub.com/>

# Overview

---

- Minus-log-probability analogous to a physical potential
- Gaussian approximation near peak of probability density function
- Probing the covariance matrix with an external force
  - ▶ deterministic technique to replace stochastic calculations
- Examples
- Potential applications

# Physical potential

- Spring produces restoring force proportional to displacement from its equilibrium position

$$F = -kx$$


- Potential is integral of force

$$\varphi(x) = \int F dx = \frac{1}{2} kx^2$$

- ▶ it is often more useful to think about a physical problem in terms of potentials instead of forces

- Derivative of potential is force

$$\frac{d\varphi(x)}{dx} = F$$

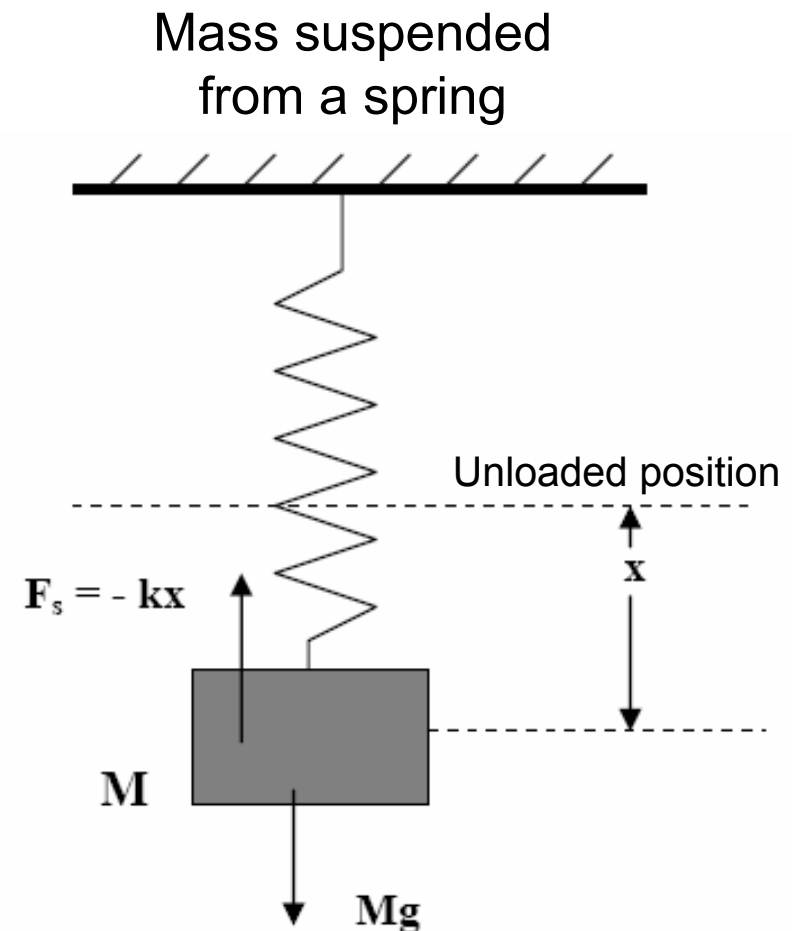

At equilibrium  
 $kx = Mg$

# Analogy to physical system

---

- Analogy between minus-log-posterior and a physical potential

$$\varphi(\mathbf{a}) = -\log p(\mathbf{a} | \mathbf{d}, I)$$

- ▶  $\mathbf{a}$  represents parameters  
 $\mathbf{d}$  represents data  
 $I$  represents background information, essential for modeling
- Gradient  $\partial_{\mathbf{a}}\varphi$  corresponds to forces acting on the parameters
- Maximum *a posteriori* (MAP) estimates parameters  $\hat{\mathbf{a}}_{\text{MAP}}$ 
  - ▶ condition is  $\partial_{\mathbf{a}}\varphi = 0$
  - ▶ optimized model may be interpreted as mechanical system in equilibrium – net force on each parameter is zero
- This analogy is very useful for Bayesian inference
  - ▶ conceptualization
  - ▶ developing algorithms

# Gaussian approximation

---

- Posterior distribution is very often well approximated by a Gaussian in the parameters
- Then,  $\varphi$  is quadratic in perturbations in the model parameters from the minimum in  $\varphi$  at  $\hat{\mathbf{a}}$ :

$$\varphi(\mathbf{a}) = \frac{1}{2} (\mathbf{a} - \hat{\mathbf{a}})^T \mathbf{K} (\mathbf{a} - \hat{\mathbf{a}}) + \varphi_{\min}$$

where  $\mathbf{K}$  is the  $\varphi$  curvature matrix (aka *Hessian*);

- Uncertainties in the estimated parameters are summarized by the covariance matrix:

$$\text{cov}(\mathbf{a}) \equiv \left\langle (\mathbf{a} - \hat{\mathbf{a}})(\mathbf{a} - \hat{\mathbf{a}})^T \right\rangle \equiv \mathbf{C} = \mathbf{K}^{-1}$$

- Inference process becomes one of finding  $\hat{\mathbf{a}}$  and  $\mathbf{C}$

# Effect of external force

---

- Consider applying an constant external force to the parameters
- Effect is to add a linearly increasing term to potential

$$\varphi'(\mathbf{a}) = \frac{1}{2} (\mathbf{a} - \hat{\mathbf{a}})^T \mathbf{K} (\mathbf{a} - \hat{\mathbf{a}}) + \varphi_{\min} - \mathbf{f}^T \mathbf{a}$$

- Gradient of perturbed potential is

$$\frac{\partial \varphi'}{\partial \mathbf{a}} = \mathbf{K} (\mathbf{a} - \hat{\mathbf{a}}) - \mathbf{f}$$


- At the new minimum, gradient is zero, so

$$\delta \mathbf{a}_{\min} = \hat{\mathbf{a}}' - \hat{\mathbf{a}} = \mathbf{K}^{-1} \mathbf{f} = \mathbf{C} \mathbf{f}$$

- Displacement of minimum in parameters,  $\delta \mathbf{a}_{\min}$ , is proportional to covariance matrix times the force
- With external force, one may “probe” the covariance
  - ▶ each applied force probes one column (or average of several)


# Effect of external force

- Displacement of minimizer of  $\varphi$ ,  $\delta a$ , may not be in direction of the applied force,  $f$
- Displacement is controlled by the covariance matrix
  - ▶ its direction is determined by correlations
  - ▶ its magnitude is proportional to variance (inversely proportional to the curvature or stiffness)

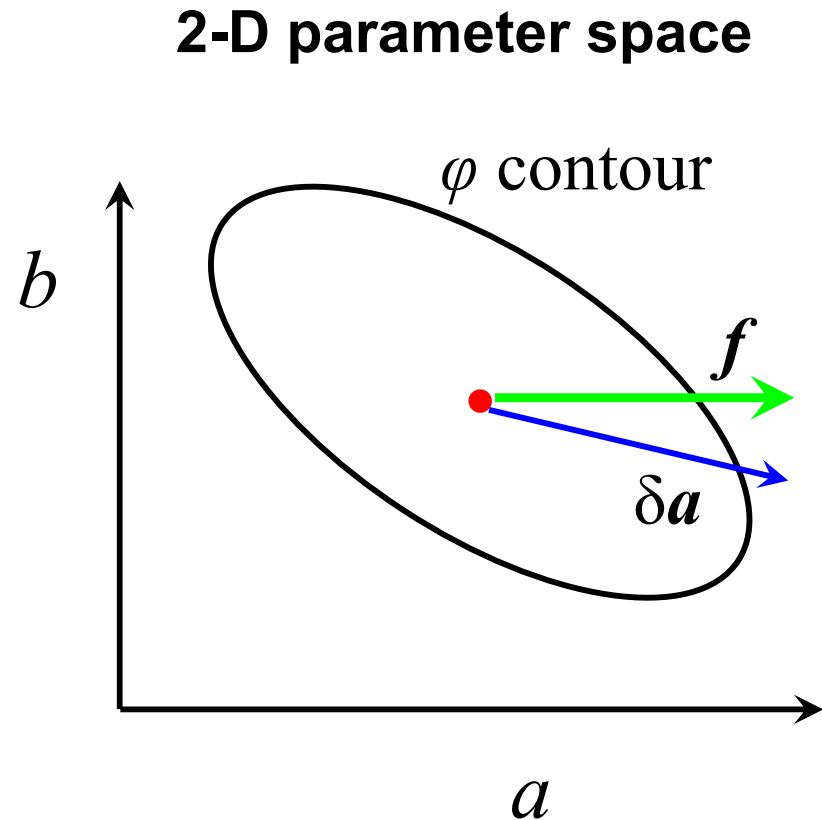

# Simulated data for straight line


- Linear model:  $y = a + bx$ 
  - $a$  is intercept at  $x = 0$
  - $b$  is slope of line
- Simulate 10 data points, with values:  $a = 0.5$   $b = 0.5$
- Add random Gaussian noise:  
 $\sigma_y = 0.2$
- Find straight line that minimizes  
$$\varphi(\mathbf{a}) = \frac{1}{2} \chi^2 = \frac{1}{2} \sum_i \frac{[d_i - y_i(x_i; \mathbf{a})]^2}{\sigma_i^2}$$
  - ▶ where  $d_i$  are the data,  $y_i$  are the model values at positions  $x_i$

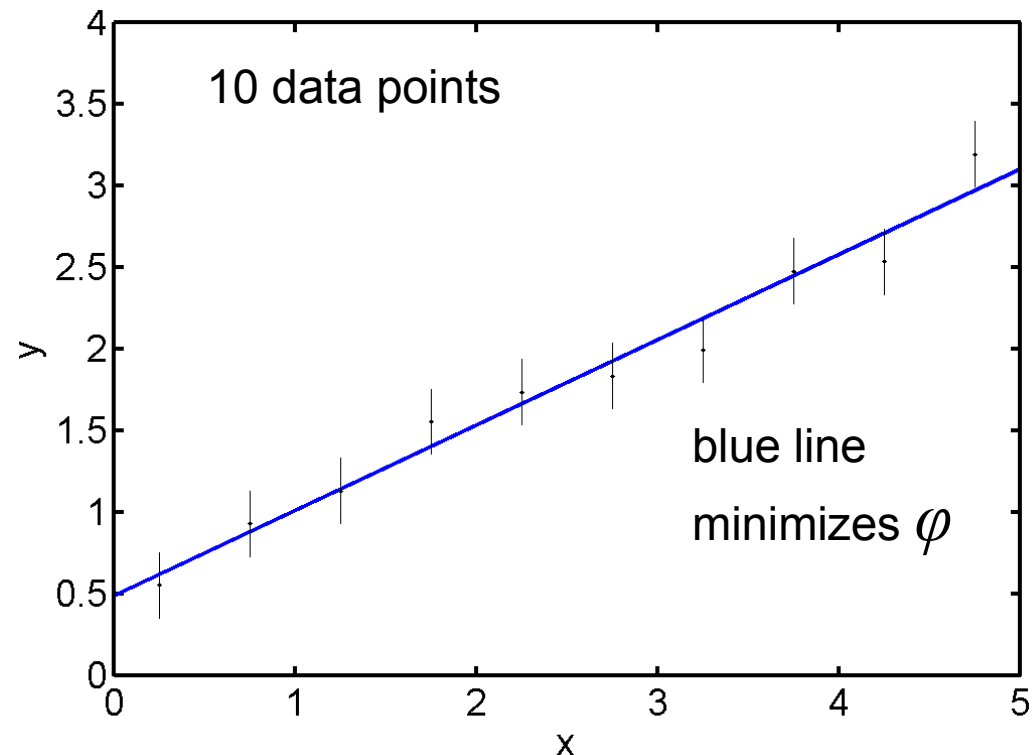



# Apply force to solution

- Apply upward force to solution line at  $x = 0$  and find new minimum in  $\varphi$ 
  - ▶ thus, pull only on parameter  $a$
- Effect is to pull line upward at  $x = 0$  **and** reduce its slope
  - ▶ data constrain solution
- New potential is
$$\varphi' = \varphi - f \times a$$
- From our physical insight, conclude that  $a$  (intercept) and  $b$  (slope) are anti-correlated

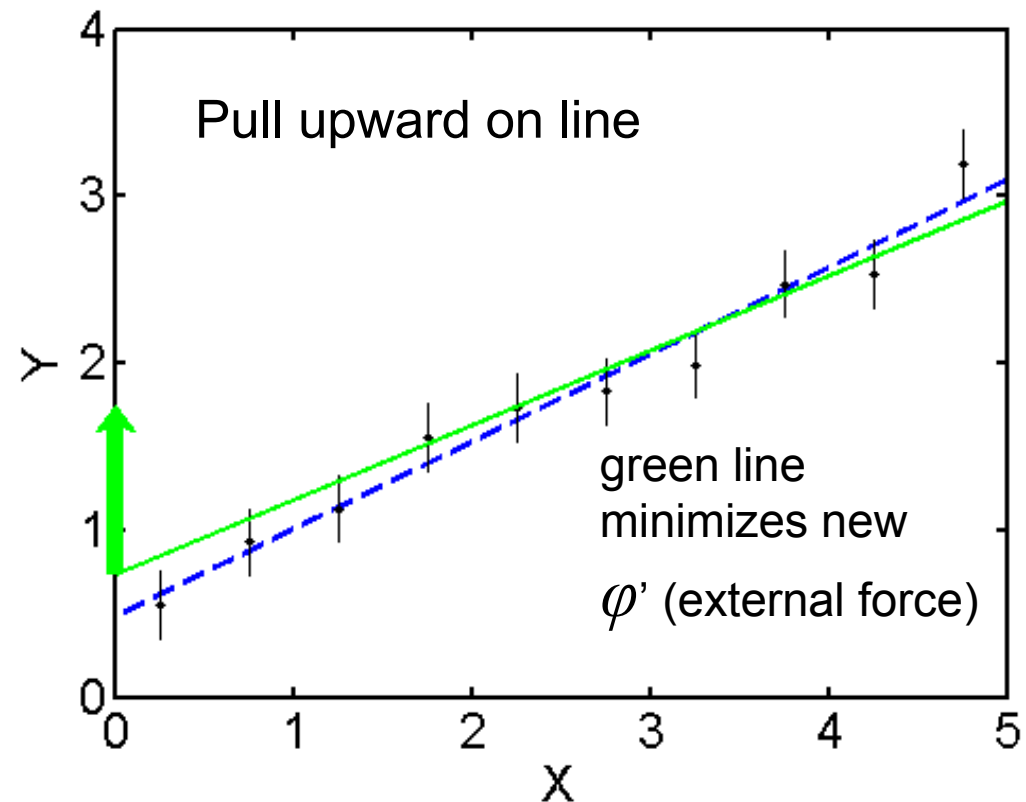


# Apply several levels of force to solution

- Family of lines shown for forces applied upward at  $x = 0$ :

$$f = \pm 7.87, \pm 15.75$$



- ▶ observe proportional displacement of intercept ( $x = 0$ )

- These results yield quantified estimates of parts of the covariance matrix

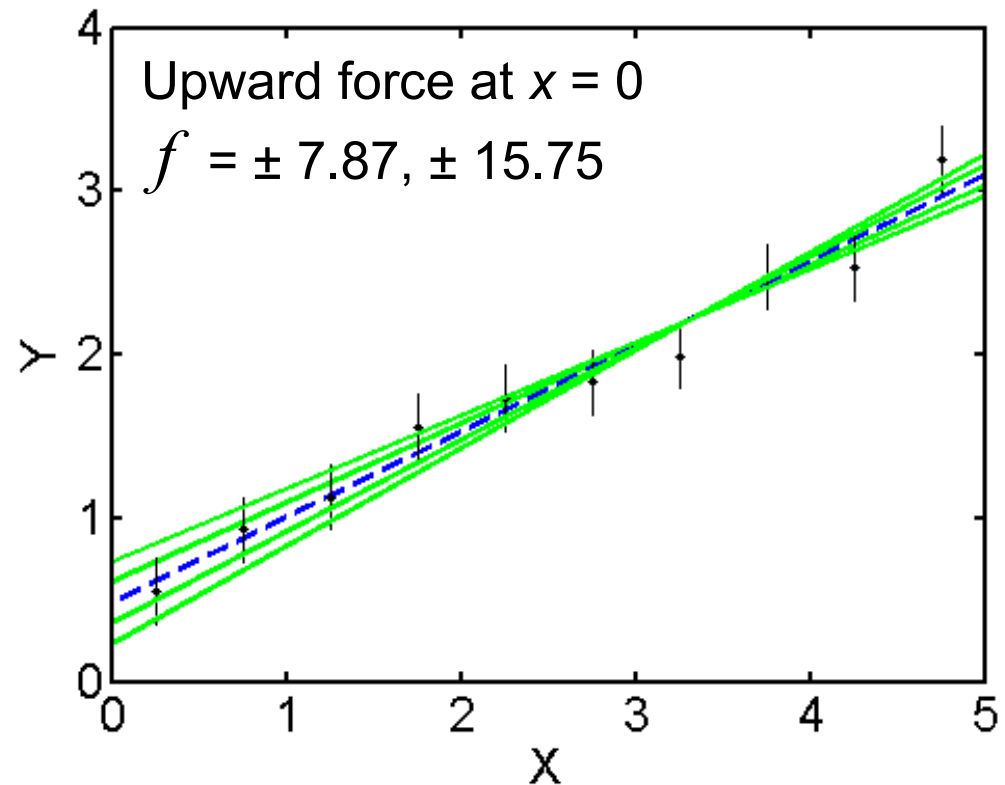



# Uncertainties in straight line fit

- Plot above shows results for variety of forces applied upward at  $x = 0$ 
  - ▶ perturbations in parameters proportional to force
  - ▶ slope of  $\delta a = \sigma_a^2 = C_{aa} = (0.127)^2$
  - ▶ slope of  $\delta b = C_{ab} = -4.84 \times 10^{-3}$
- Plot below shows change in min.  $\varphi$  is quadratic function of force
  - ▶ for force  $f = \pm \sigma_a^{-1} = (0.127)^{-1}$  min  $\varphi$  increases by 0.5 (min  $\chi^2$  increases by 1)
- Either dependence provides a way to quantify (co)variance estimates
- $C_{bb}$  not determined

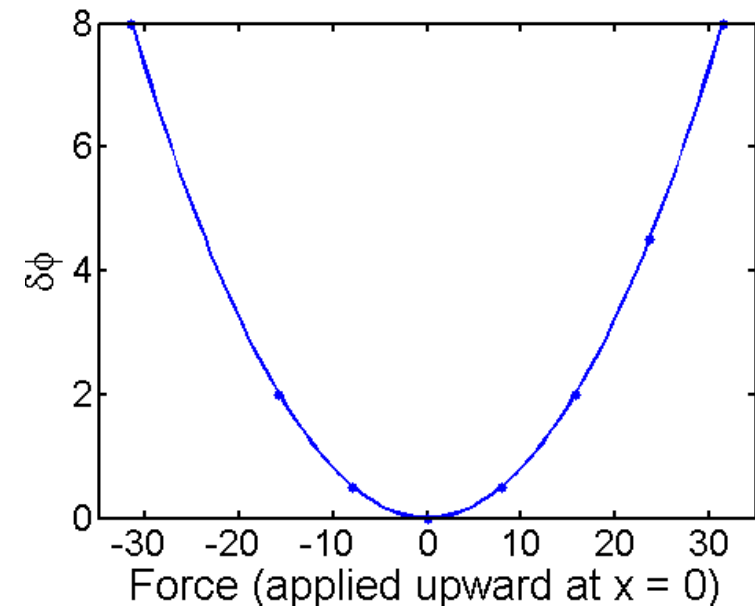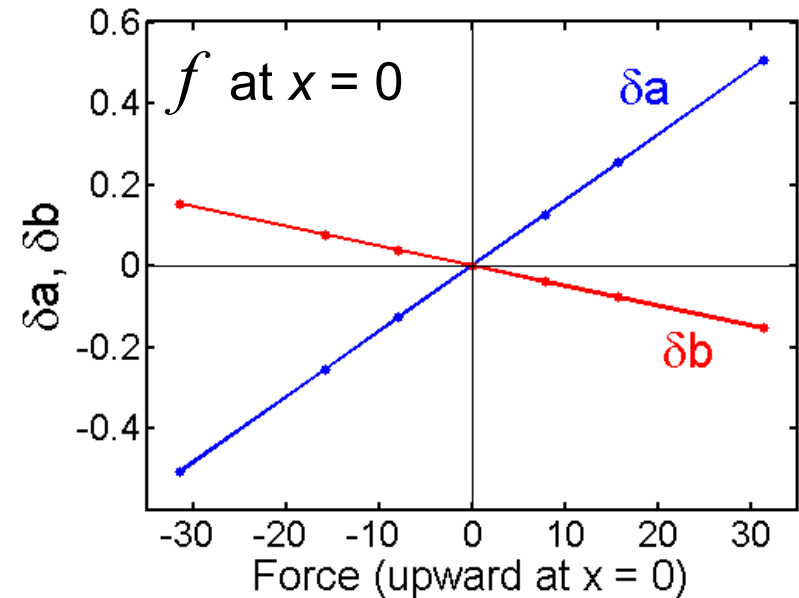


# Compare to result from standard minimum- $\chi^2$

- Fit linear model:  $y = a + bx$
- Determine parameters  $a$  and  $b$  by minimum  $\chi^2$  (least-squares) analysis
- Results:  $\chi_{\min}^2 = 4.04$   $p = 0.775$   
 $\hat{a} = 0.484$   $\hat{b} = 0.523$   
 $\sigma_a = 0.127$   $\sigma_b = 0.044$ 
  - ▶ correlation:  $r_{ab} = -0.867$
- Covariance estimates from these
  - ▶  $C_{aa} = \sigma_a^2 = (0.127)^2$
  - ▶  $C_{ab} = r_{ab} \sigma_a \sigma_b = -4.84 \times 10^{-3}$
  - ▶ these are identical to estimates obtained by applying external force
  - ▶  $C_{bb}$  not determined with external force

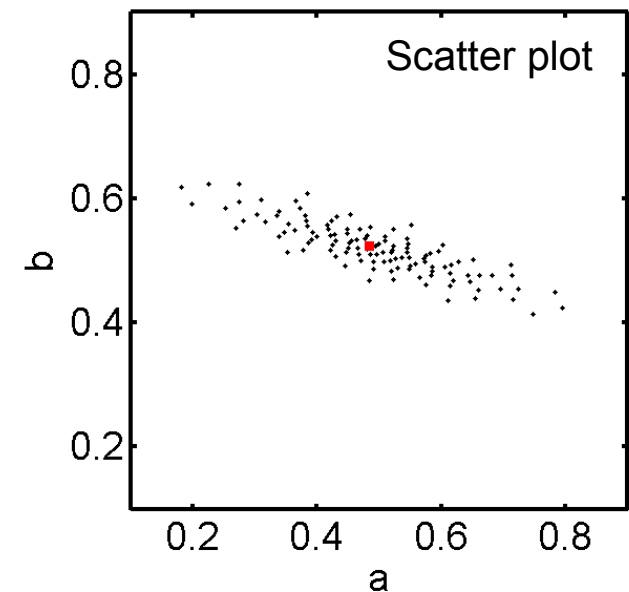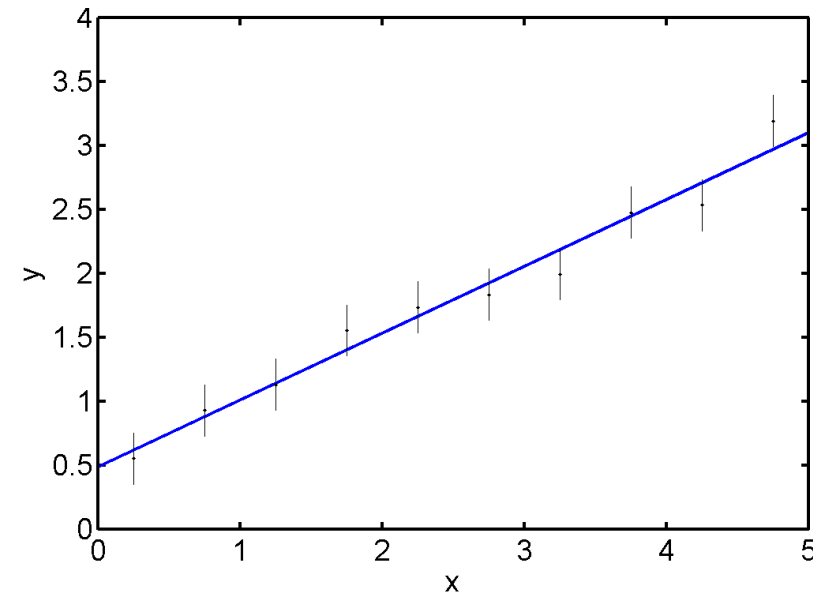

# Simple spectrum problem

- Simulate simple spectrum with a single peak:
  - ▶ Gaussian peak ( $\text{ampl} = 2, w = 0.2$ )
  - ▶ quadratic background
  - ▶ add random noise ( $\text{rmsdev} = 0.2$ )
- Minimize  $\varphi$  wrt 6 parameters
  - ▶ amplitude, width, position of peak
  - ▶ 3 coefficients for quadratic background
- Nonlinear problem
- Suppose quantity of interest is the area under the peak;
  - ▶ what force should be applied to parameters?

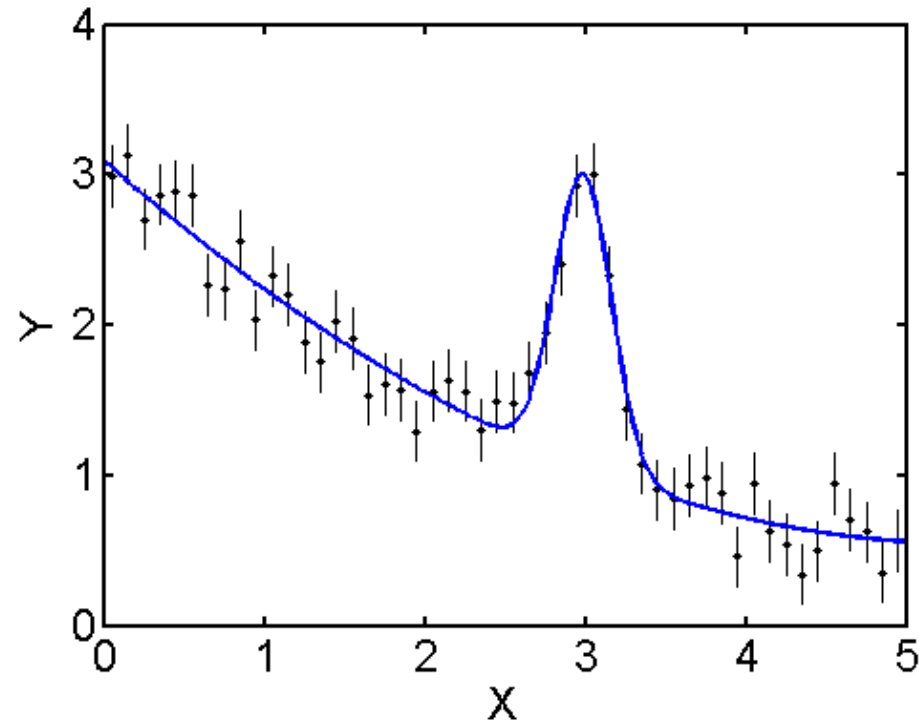

# External force for derived quantities

---

- Consider a scalar quantity  $z$ , which is a function of parameters  $\mathbf{a}$

$$z = z(\mathbf{a})$$

- The small perturbation  $\delta\mathbf{a}$  results in a perturbation in  $z$

$$\delta z = \mathbf{s}_z^T \delta\mathbf{a}$$

- ▶ where  $\mathbf{s}_z$  is the sensitivity vector for  $z$  (derivative of  $z$  wrt  $\mathbf{a}$ )

- The variance in  $z$  is

$$\mathbf{C}_z = \text{var}(z) \equiv \langle \delta z \delta z^T \rangle = \langle \mathbf{s}_z^T \delta\mathbf{a} \delta\mathbf{a}^T \mathbf{s}_z \rangle = \mathbf{s}_z^T \mathbf{C}_a \mathbf{s}_z$$

- standard result for propagating covariance

- The force on parameters  $\mathbf{a}$  needed to probe  $z$  is

$$\mathbf{f}_z = \mathbf{s}_z = \partial_{\mathbf{a}} z$$


resulting in

$$\delta z = \mathbf{C}_z \mathbf{f}_z$$

which is the same relation as for  $\delta\mathbf{a}$



# Simple spectrum – apply force to peak area

- Area under Gaussian peak;  
 $a$  = amplitude,  $w$  = rms width:  
$$A = \sqrt{2\pi}aw$$
$$= 0.86$$
- To examine the area, apply force to parameters proportional to derivatives of area wrt parameters,  
$$\frac{\partial A}{\partial a} = \sqrt{2\pi}w \quad \frac{\partial A}{\partial w} = \sqrt{2\pi}a$$
- Plot shows result of applying force proportional to these derivatives
  - ▶ area of Gaussian increased
  - ▶ background altered slightly

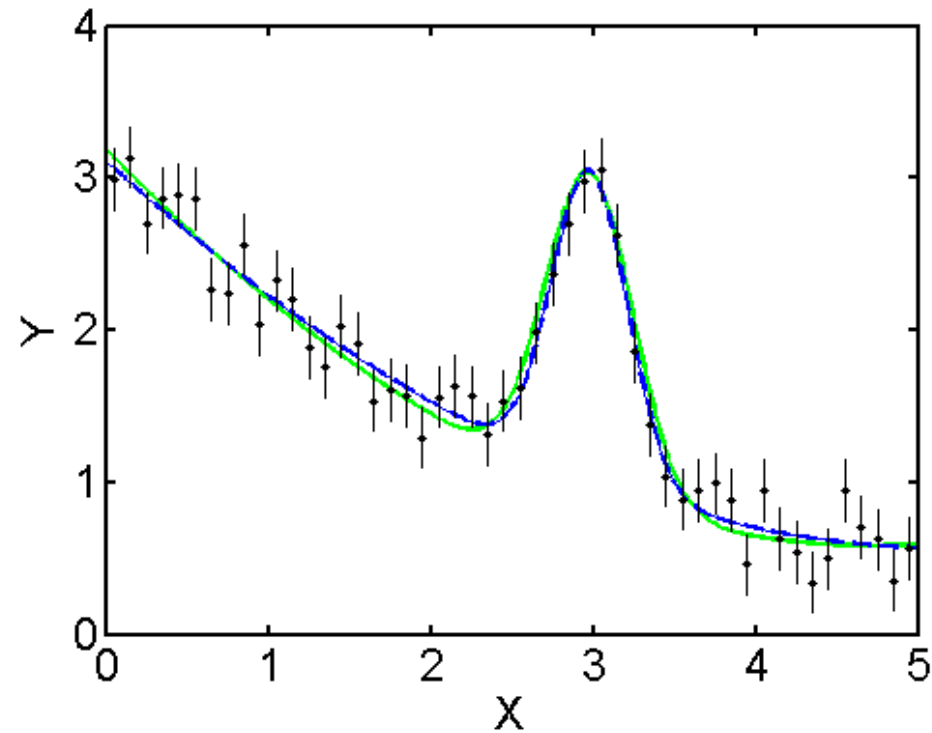

# Simple spectrum – apply force to peak area

- Examples of sizable +/- forces applied to area

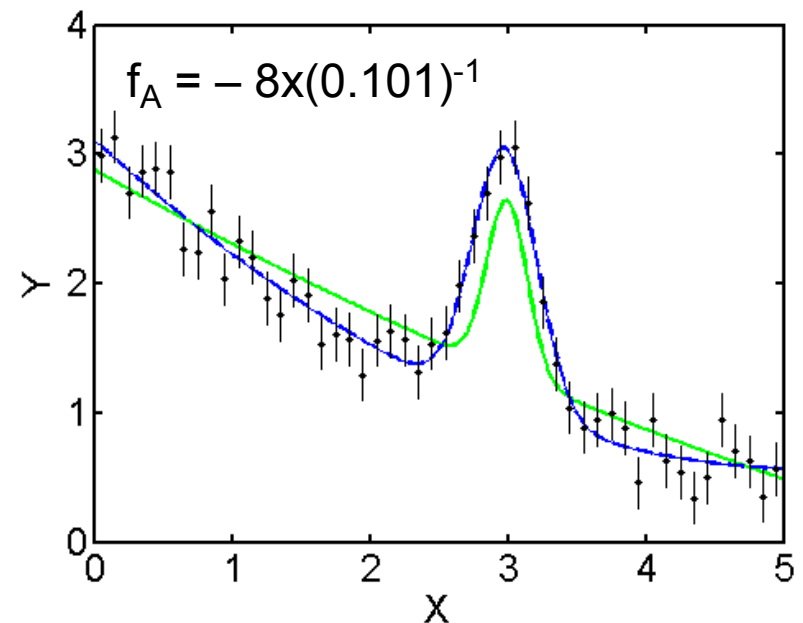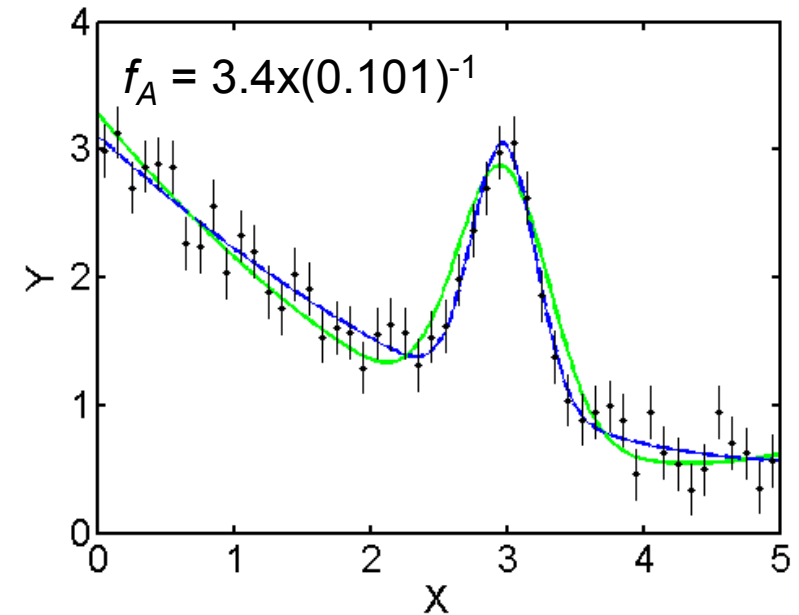





# Simple spectrum – apply force to peak area

- Plot shows nonlinear response, but approximately linear for small  $f$
- Plot below shows  $\delta\varphi_{min}$  as function of displacement  $\delta A$
- $\delta\varphi$  has quadratic form for small  $\delta A$


$$\delta\varphi = \frac{1}{2} \left[ \frac{\delta A}{\sigma_A} \right]^2$$

- ▶ this relation allows one to estimate  $\sigma_A$  from a displacement produced by single small applied force:
- ▶  $\sigma_A = 0.098$  (– side);  $0.104$  (+ side)

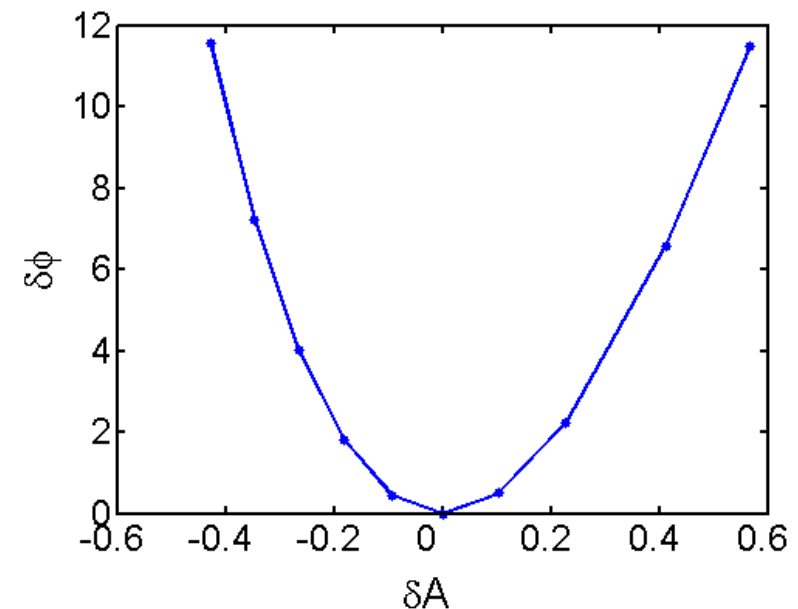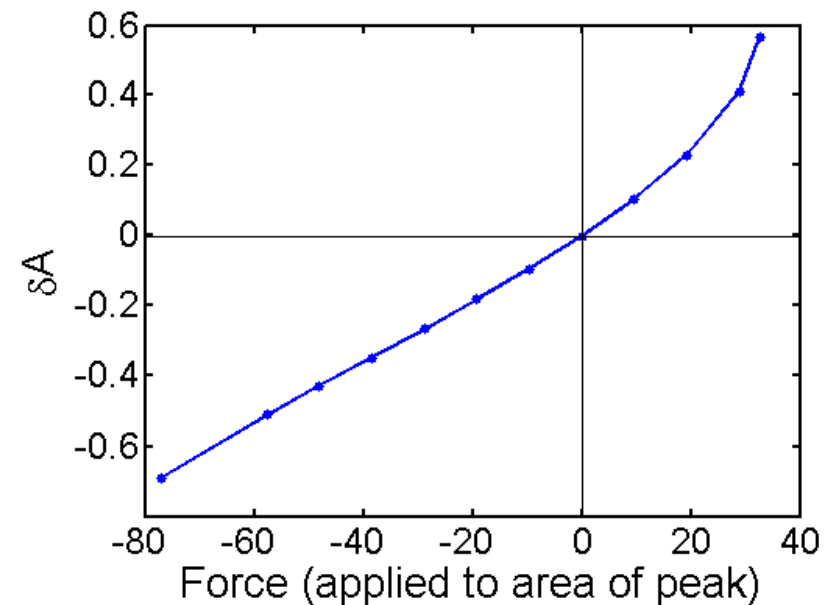

# Compare to standard $\chi^2$ analysis

- Minimum  $\chi^2$  fit
- Fit involves 6 parameters
  - ▶ nonlinear problem
  - ▶ results:  $\chi^2_{\min} = 34.32$   $p = 0.852$   
ampl.  $\hat{a} = 1.948$   $\sigma_a = 0.149$   
width  $\hat{w} = 0.1759$   $\sigma_w = 0.0165$
  - ▶ correlation:  $r_{aw} = -0.427$

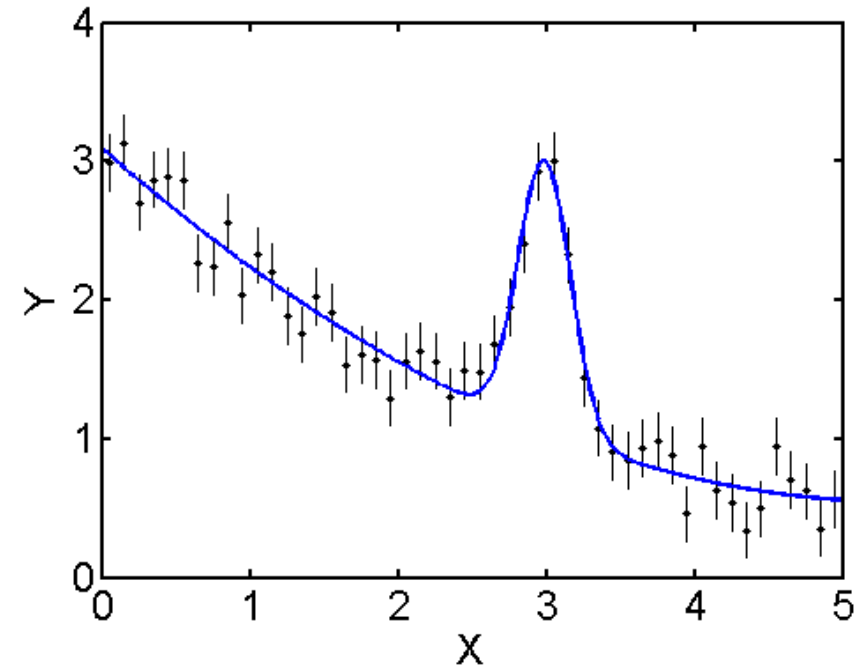

- From these, standard error in area

$$\sigma_A = \sqrt{2\pi} \left[ w^2 \sigma_a^2 + a^2 \sigma_w^2 - r_{aw} a w \sigma_a \sigma_w \right]^{1/2} = 0.093$$

- ▶ this result agrees fairly well with external force estimates (0.098 and 0.104), considering nonlinearity

# Summary of steps to estimate variance

---

- Find values of model parameters  $\mathbf{a}$  that minimize  $\varphi$
- Decide on quantity of interest  $z$
- If  $z$  is not one of parameters, calculate  $\mathbf{s}_z = \partial_{\mathbf{a}} z$
- Find parameter values that minimize  $\varphi' = \varphi - k \mathbf{s}_z^T \mathbf{a}$ , for some scaling factor  $k$  (appropriate value is about  $\sigma_z^{-1}$ )
- Check that change in  $\varphi$  is around 0.5; if not adjust  $k$  and minimize  $\varphi'$  again
- From perturbations in parameters, estimate standard error in  $z$  by either formula:
  - ▶  $\sigma_z^2 = \frac{\delta z}{k}$  or  $\sigma_z = \frac{\delta z}{\sqrt{2 \delta \varphi}}$
- Further diagnostics may be helpful, if more calculations feasible


# Tomographic reconstruction from two views

- Problem: reconstruct uniform-density object from two projections
  - ▶ 2 orthogonal, parallel projections (128 samples in each)
  - ▶ Gaussian noise added
  - ▶ assume smooth boundary

**Original object**




**Two orthogonal projections  
with 5% rms noise**

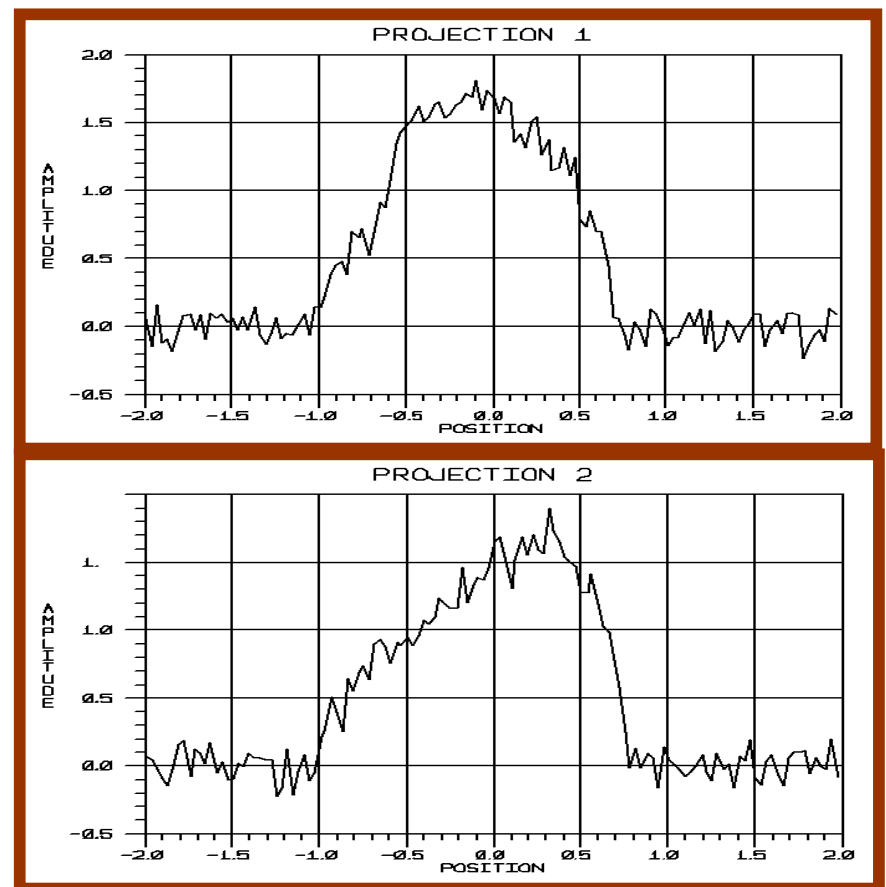

# The Bayes Inference Engine

- BIE data-flow diagram to find max. a posteriori (MAP) solution

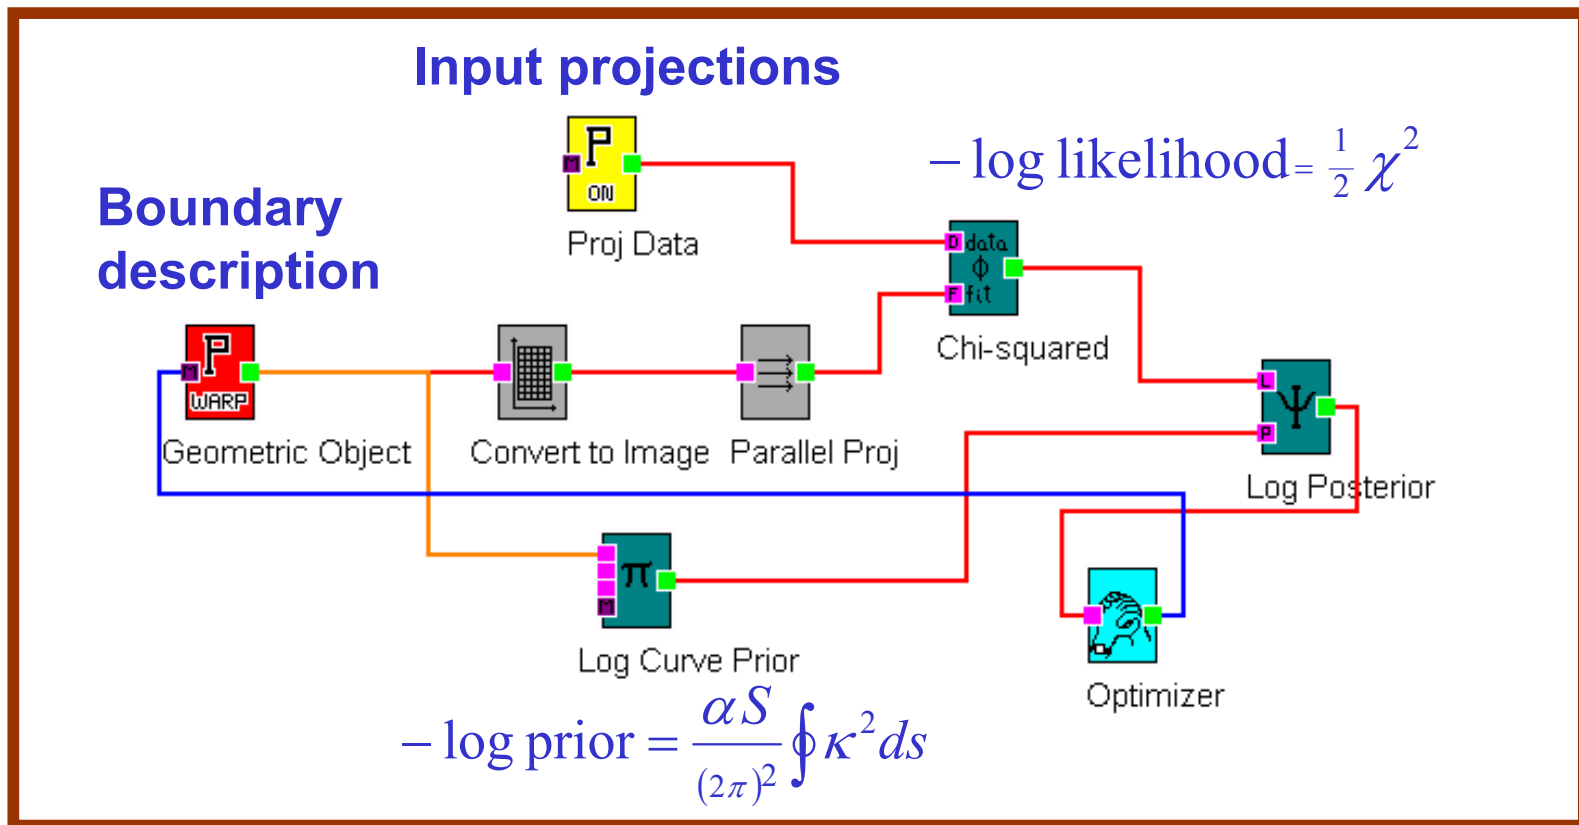


- ▶ Optimizer uses gradients that are efficiently calculated by **adjoint differentiation**, a key capability of the BIE

# MAP reconstruction – two views

---

- Model object in terms of:
  - ▶ deformable polygonal boundary with 50 vertices
  - ▶ boundary smoothness constraint
  - ▶ constant interior density
- Determine boundary that maximizes posterior probability
- Reconstruction not perfect, but very good for only two projections
- Question is:  
How do we quantify uncertainty in reconstruction?

**Reconstructed boundary (gray-scale) compared with original object (red line)**

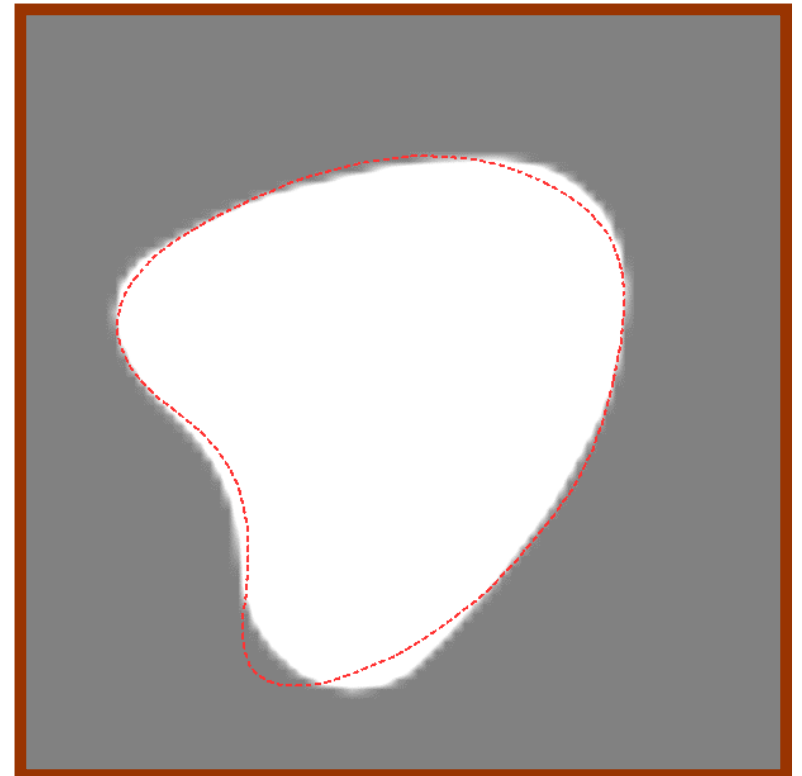


# Tomographic reconstruction from two views

---

- Stiffness of model proportional to curvature of  $\varphi$
- Displacement obtained by applying a force to MAP model and re-minimizing  $\varphi$  is proportional to a (or average of) column(s) of **covariance matrix**
- Displacement divided by force
  - ▶ at position of force, it is proportional to variance there
  - ▶ elsewhere, it is proportional to covariance
- This approach may be efficient alternative to MCMC

Applying force (white bar) to MAP boundary (red) moves it to new location (yellow-dashed)

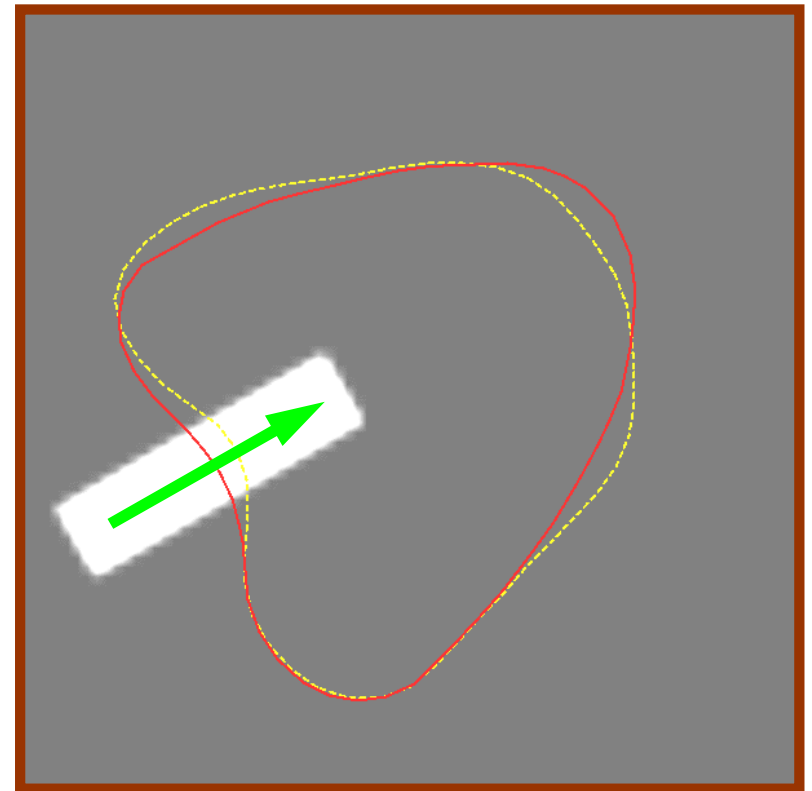


# Covariance using MCMC

---

- Use MCMC to draw samples from posterior
- Parameters consist of 50 vertices defining object boundary
- MCMC (Metropolis) 150,000 steps; display shows three selected boundaries
- Advantage: obtain full covariance matrix
- Disadvantage: calculation takes over 2000 times longer than technique of probing posterior

3 boundaries from 150,000  
MCMC steps

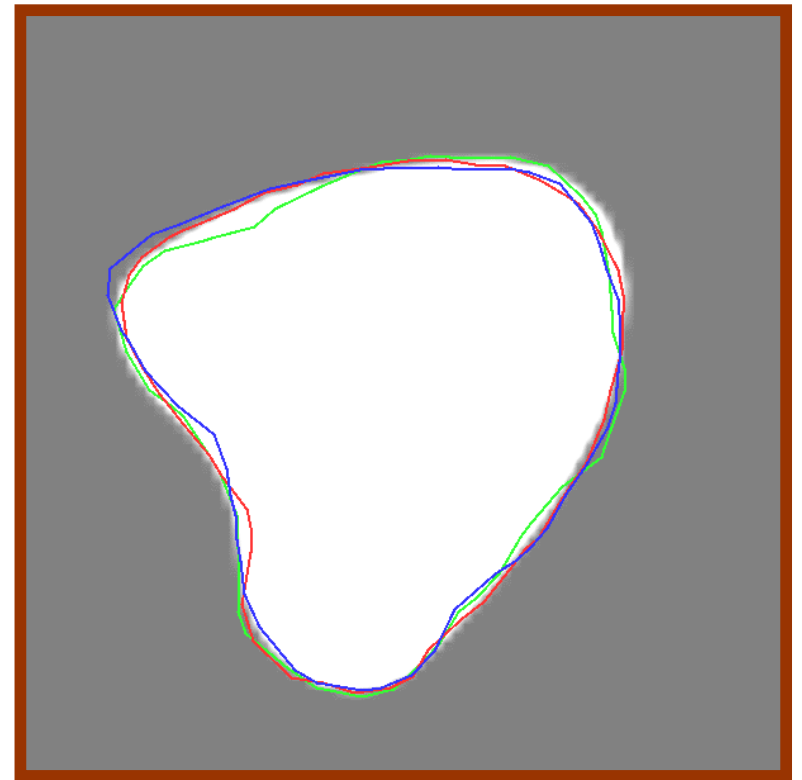

compared uncertainties to  
MAP estimated object



# Summary

---

- Technique has been presented that
  - ▶ is based on interpreting minus-log-posterior as physical potential energy
  - ▶ allows one to directly probe a specified component of covariance matrix by applying force to estimated model
  - ▶ replaces a stochastic calculation (e.g., MCMC) by a deterministic one
  - ▶ may efficiently provide uncertainty estimates in computational situations

# Situations where probing covariance useful

---

- Technique will be most useful when
  - ▶ interest is in uncertainty in one or a few parameters or derived quantities out of many parameters
  - ▶ full covariance matrix is not known (nor desired)
  - ▶ posterior can be well approximated by Gaussian pdf in parameters
  - ▶ optimization easy to do
  - ▶ gradient calculation (for optimization) can be done efficiently, e.g. by adjoint differentiation of the forward simulation code
- Technique may also be useful for exploring and quantifying
  - ▶ non-Gaussian posterior pdfs, including situations with inequality constraints, e.g., non-negativity
  - ▶ general pdfs; in contexts other than probabilistic inference
  - ▶ pdfs of self-optimizing natural systems (populations, bacteria, traffic)

# Research topics

---

- Need to explore behavior of probing technique for
  - ▶ non-Gaussian posterior pdfs
  - ▶ inequality constraints, e.g., non-negativity
  - ▶ derived quantities with nonlinear dependence on parameters

# Bibliography

---

- ▶ "The hard truth," K. M. Hanson and G. S. Cunningham, *Maximum Entropy and Bayesian Methods*, J. Skilling and S. Sibisi, eds., pp. 157-164 (Kluwer Academic, Dordrecht, 1996)
- ▶ Uncertainty assessment for reconstructions based on deformable models," K. M. Hanson et al., *Int. J. Imaging Syst. Technol.* **8**, pp. 506-512 (1997)
- ▶ "Operation of the Bayes Inference Engine," K. M. Hanson and G. S. Cunningham, *Maximum Entropy and Bayesian Methods*, W. von der Linden et al., eds., pp. 309-318 (Kluwer Academic, Dordrecht, 1999)
- ▶ *Evaluating Derivatives: Principles and Techniques of Algorithmic Differentiation*, A. Griewank (SIAM, 2000)

This presentation available at <http://kmh-lanl.hansonhub.com/>

# Other relevant topics

---

- ▶ "Kinky tomographic reconstruction," K. M. Hanson, R. L. Bilisoly, and G. S. Cunningham, *Proc. SPIE* **2710**, pp. 156-166 (1996); visualizing adjoint of reconstruction shows where data require change in model/prior
- ▶ "Posterior sampling with improved efficiency," K. M. Hanson and G. S. Cunningham, *Proc. SPIE* **3338**, pp. 371-382 (1998); ways to improve MC efficiency, e.g., by using estimate of inverse Hessian from BFGS
- ▶ "Markov Chain Monte Carlo posterior sampling with the Hamiltonian method," K. M. Hanson, *Proc. SPIE* **4322**, pp. 456-467 (2001); dynamical method to do MCMC (courtesy of physical analogy); also, an efficiency test for MCMC
- ▶ "Improved predictive sampling using quasi-Monte Carlo with applications to neutron-cross-section evaluation," K. M. Hanson, presented at *French CEA*, Bruyeres-le-Chatel, France, July, 2006; quasi-uniform random sampling may improve accuracy over MC sampling ( $N^{-1}$  vs.  $N^{-1/2}$ )
- ▶ "Lessons about likelihood functions from nuclear physics," K. M. Hanson, in *Bayesian Inf. and Max. Ent. Methods in Sci. and Eng.*, *AIP Conf. Proc.* **954**, pp. 458-467 (AIP, Melville, 2007); some measurement-error distributions have long tails

These papers and corresponding talks available at <http://knh-lanl.hansonhub.com/>